

4

3

2

1

D

D

C



C

B

B

A

A

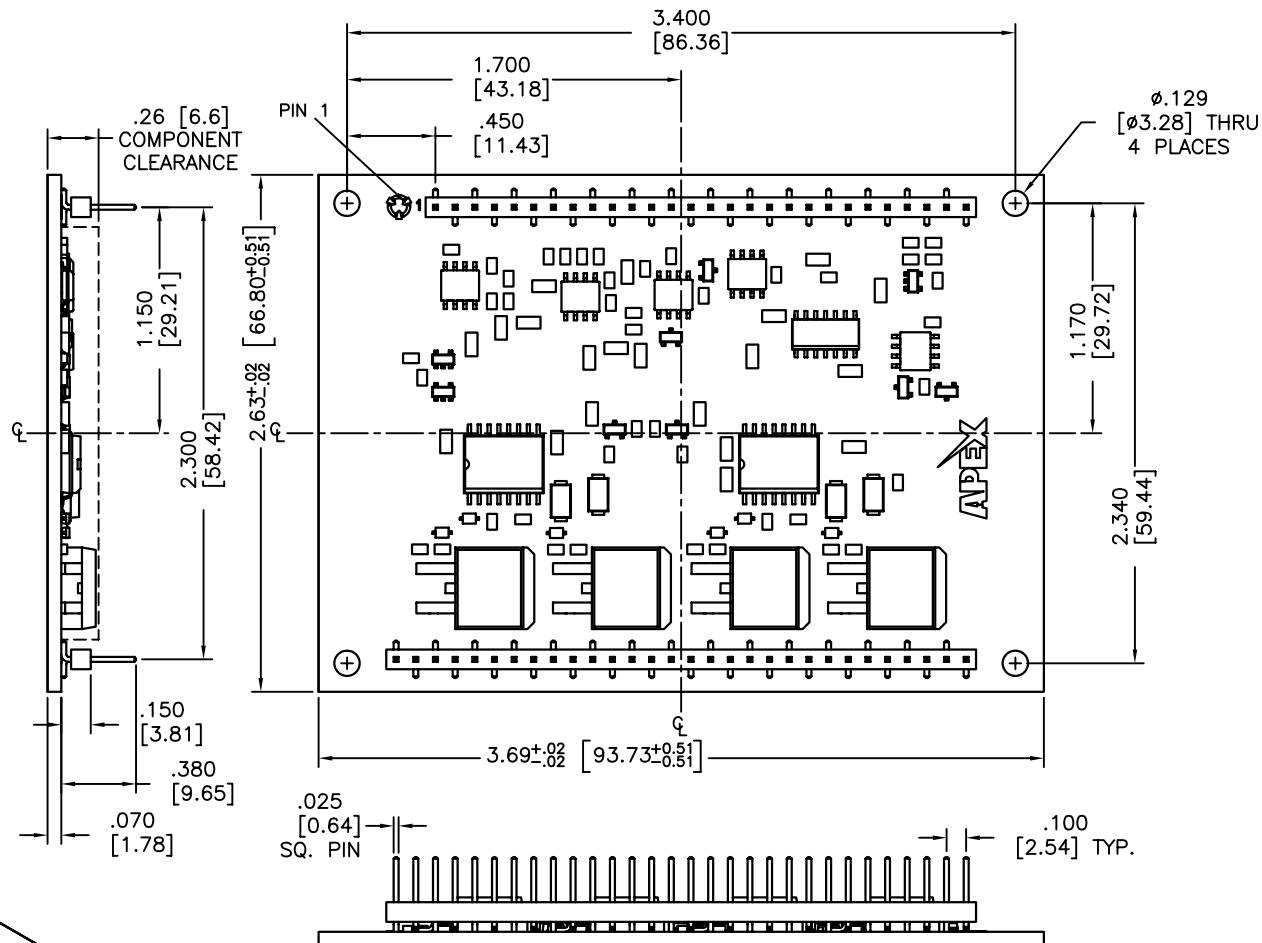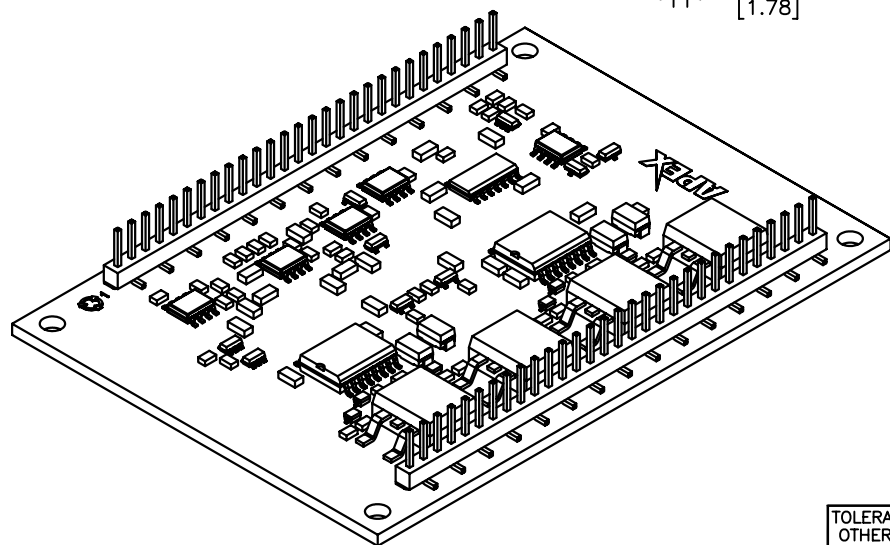

#### NOTES:

1. Dimensions are inches; alternate units are [mm].
2. Recommended PCB hole diameter for pins: .050 [1.27].
3. 2oz. copper over 600V dielectric over aluminum substrate.
4. Tin over nickel plated phosphor bronze pins.
5. Package weight: 42.8gm.
6. Mount with #4 or equivalent screws.
7. It is not recommended that mounting of the package rely on the pins for mechanical support.

TOLERANCES - UNLESS OTHERWISE SPECIFIED

.XX =  $\pm .01$   
 .XXX =  $\pm .005$   
 ANG. =  $\pm .5^\circ$

**APEX**  
 MICROTECHNOLOGY

TITLE  
**MODULAR 58-PIN DIP, 2.3 SPACING**

MODEL

**KC**

SUBJECT  
 MECHANICAL PACKAGE OUTLINE

ENG.	TECH/DRAW.	DCA	SRL	OF	FILENAME	REV	DATE
D-M	JCA	50401	1	1	KC	3	10/25/05

4

3

2

1